

Product Description



alumiLAST® Decking Specifications

PRODUCT DESCRIPTION

A powder coated extruded aluminum deck material available in five standard colors and is also available in custom colors. alumiLAST® Decking is virtually watertight.

PART 1 GENERAL

1.1 WORK INCLUDED:

- A. Provide aluminum decking in length sections per approved engineering drawings.

1.2 SUBMITTALS:

- A. Provide accurate counts of number of pieces and proper lengths required

1.3 QUALITY ASSURANCE:


- A. Deck boards are based upon alumiLAST® decking as the standard of quality. No substitutions will be accepted.
- B. Design criteria: decking shall be designed to conform to all applicable building codes and loading requirements.

1.4 WARRANTY:

- A. Limited lifetime warranty covering material and workmanship
(See manufacturer's warranty statement for specific details)

1.5 DELIVERY, STORAGE, AND HANDLING:

- A. Deliver materials to the job site in good condition. Purchaser to store in clean, dry location, properly protected against damage to finished surfaces.
- B. Store away from uncured concrete, masonry, or stucco

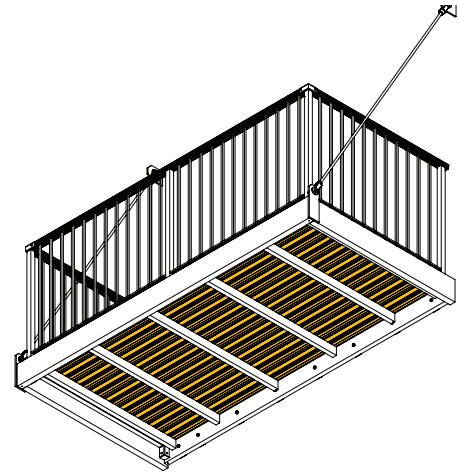

PART 2 PRODUCTS

2.1 MATERIALS:

- A. Extrusion Alloy: 6005A-T5
- B. Screws, bolts, washers, hardware shall be stainless steel or other corrosion resistant material.

2.2 FINISHES:

- A. TGIC polyester powder coating, electro-statically applied to 2-3 mil thickness. Color to be selected by the architect/owner from manufacturer's standard or custom colors.

2.3 DECKING DIMENSIONS:

- A. The sections are 1.00" deep x 6.5" wide with a tongue and groove interlock system to provide a finish width of 6" per section
- B. Sections are available in 12', 16', 20' and custom lengths

6500 Shingle Creek Parkway • Brooklyn Center, MN 55430

800.933.2060

www.endurable.com

Product Description

alumiLAST® Decking Specifications



PART 3 EXECUTION

3.1 INSTALLATION:

- A. Install work in accordance with manufacturer's instructions

3.2 CLEANING:

- A. Wash decking using clean water and soap, rinse with water
- B. Do not use acid solution, steel wool, or other harsh abrasives

6500 Shingle Creek Parkway • Brooklyn Center, MN 55430

800.933.2060

www.endurable.com